

CEILING / DECKENANBAU
ADJUSTABLE / EINSTELLBAR



CODE	BEAM ANGLE	DRIVER	TRIM COLOUR	KELVIN	CRI	COLOUR
MS6xxxxxxxxxx	03 Flood 30°	0 No Driver	01 White	27 2700	90	1 White
	04 MWFL 43°		02 Black	30 3000		2 Black
			05 Gold	40 4000		

MASSA₆₀

Surface spot light of compact size die-cast aluminium body. Different reflectors. Long lumen maintenance 50.000 hours (L80 B10). Up to SDCM: 2 allowing a consistent white light colour between modules and over their lifetime. Driver not included. Suitable drivers from page 231.

Deckenanbaustrahler im kompakten Design. Gehäuse Aluminium, verschiedene Reflektoren möglich. Lebensdauer 50.000 Stunden (L80 B10). SDCM: 2. LED-Chips für eine konstante Farbtemperatur über die Lebensdauer. Treiber nicht enthalten. Passende Treiber auf Seite 231.


Technical Data / Technische Daten

Massa 60	
Housing Colour / Gehäusefarbe	White, Black / Weiß, Schwarz
Beam Angle / Abstrahlwinkel	30°, 43°
Max. Power / Max. Leistung	10 W @ 250 mA
Max. Luminaire Flux* / Max. Leuchtenlichtstrom*	714 lm
Max. Efficacy* / Max. Effizienz*	71 lm/W
Lifetime / Lebensdauer L80 B10	50.000 h

*) depending on version and input current / abhängig von Ausführung und Eingangsstrom




Versions / Ausführungen

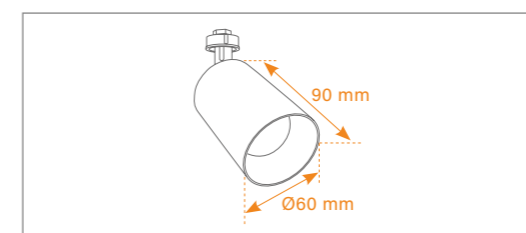


Colour Temperature/ Farbtemperatur	CRI	Luminaire Luminous Flux/ Leuchtenlichtstrom	Connection Power/ Anschlussleistung	Efficacy/ Effizienz
2700K	90	676 lm	10 W	68 lm/W
3000K	90	702 lm	10 W	70 lm/W
4000K	90	714 lm	10 W	71 lm/W

Beam Angle / Abstrahlwinkel

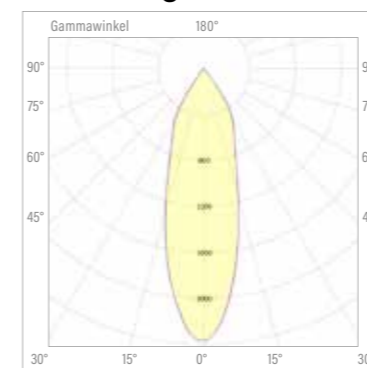

30° Flood

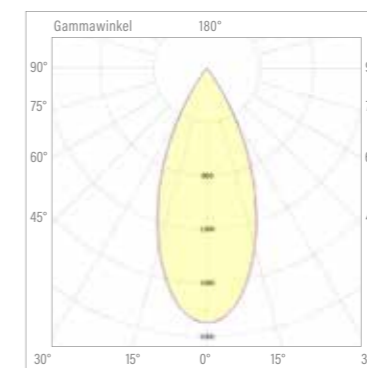

43° MWFL