


RECESSED DOWNLIGHT
ADJUSTABLE / EINSTELLBAR



Replaceable light source
by **END-USER**



90° 350° 89 mm

BASIC CODE	HOUSING COLOUR	BEAM ANGLE	TRIM COLOUR	ADDITIONAL ACCESSORY	LAMP
PRRD	W White	24 24°	W White	H Honeycomb	927 CRI90 2700K
	B Black	46 46°	B Black	<blank> None	930 CRI90 3000K
			G Gold		940 CRI90 4000K
					DTW CRI90 Dim-To-Warm (1800-3000K)

PRATO RECESSED


Replaceable LED-Lamps

Surface-mounted LED ceiling or wall luminaire, round, swivelling head: 350° rotation and 90° tilt, aluminium die-cast body. Modular and sustainable system consisting of housing, trim, lens and lamp with twist & lock socket (GH27d) that can be replaced by the end user. Honeycomb grid and replacement components can be ordered separately. The luminaire is delivered fully configured with lamp. Driver not included. Suitable drivers from page 221.

LED-Deckenhalbeinbauleuchte, rund, Leuchtenkopf 350° drehbar und 90° schwenkbar, Gehäuse aus Aluminiumdruckguss. Modulares und nachhaltiges System aus Gehäuse, Blende, Linse und vom Endbenutzer austauschbarer Lampe mit Twist & Lock-Fassung (GH27d). Wabenraster und Austauschkomponenten separat bestellbar. Die Leuchte wird fertig konfiguriert mit Lampe ausgeliefert. Treiber nicht enthalten. Passende Treiber ab Seite 221.

Prato Recessed	
Housing Colour / Gehäusefarbe	White, Black / Weiß, Schwarz
Beam Angle / Abstrahlwinkel	24°, 46°
Lamp Holder / Fassung	
Connection Power / Anschlussleistung	14 W @ 350 mA
Max. Luminaire Flux* / Max. Leuchtenlichtstrom*	1819 lm
Max. Efficacy* / Max. Effizienz*	126 lm/W
Lifetime / Lebensdauer L80 B10	50.000 h


*) depending on version and input current / abhängig von Ausführung und Eingangsstrom

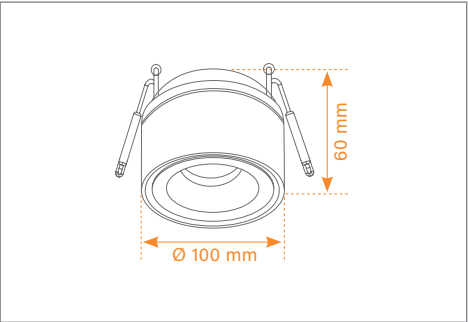

Colour Temperature/ Farbtemperatur	CRI	Luminaire Luminous Flux/ Leuchtenlichtstrom	Connection Power/ Anschlussleistung	Input Current/ Eingangsstrom	Efficacy/ Effizienz
2700K	90	1710 lm	14 W	350 mA	119 lm/W
3000K	90	1739 lm	14 W	350 mA	121 lm/W
4000K	90	1819 lm	14 W	350 mA	126 lm/W
Dim to warm 1800K - 3000K	90	1218 lm	14 W	350 mA	85 lm/W

(Dim to Warm @ 3000K/350 mA / bei 3000K/350 mA)

Beam Angle / Abstrahlwinkel

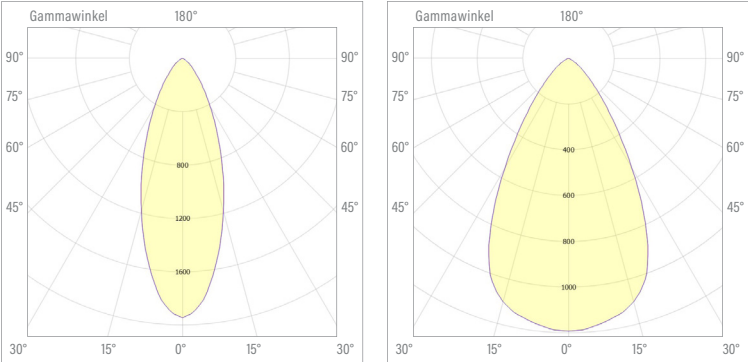

37°

58°