

RECESSED DOWNLIGHT
ADJUSTABLE / EINSTELLBAR



CODE	BEAM ANGLE	KELVIN	CRI	COLOUR
V0303Rxxxxxxx	02 Spot 22°	27 2700	97	1 White
	03 Flood 36°	30 3000	90	2 Black
	04 MWFL 43°	40 4000	80	

VENEZIA V3 ADJUSTABLE



Aluminium die-casting sink, patented passive cooling system. Highest-grade silver anodized reflector. Long lumen maintenance 50.000 hours (L80 B10). Up to SDCM: 2 allowing a consistent white light colour between modules and over their lifetime. UGR <19. Driver not included. Suitable drivers from page 221.

Leuchtenkörper aus Alu-Druckguss, patentierte passive Kühlung. Reinaluminium-Reflektor silber eloxiert. Lebensdauer 50.000 Stunden (L80 B10). SDCM: 2 LED-Chips für eine konstante Farbtemperatur über die Lebensdauer. UGR <19. Treiber nicht enthalten. Passende Treiber ab Seite 221.

Technical Data / Technische Daten

V3 Adjustable	
Housing Colour / Gehäusefarbe	White, Black / Weiß, Schwarz
Beam Angle / Abstrahlwinkel	22°, 36°, 43°
Max. Power / Max. Leistung	8 W @ 180 mA
Max. Luminaire Flux* / Max. Leuchtenlichtstrom*	572 lm
Max. Efficacy* / Max. Effizienz*	72 lm/W
Lifetime / Lebensdauer L80 B10	50.000 h


*) depending on version and input current / abhängig von Ausführung und Eingangsstrom



Versions / Ausführungen

Colour Temperature/ Farbtemperatur	CRI	Luminaire Luminous Flux/ Leuchtenlichtstrom	Connection Power/ Anschlussleistung	Efficacy/ Effizienz
2700K	97	433 lm	8 W	54 lm/W
3000K	90	475 lm	8 W	59 lm/W
4000K	80	572 lm	8 W	72 lm/W

Beam Angle / Abstrahlwinkel

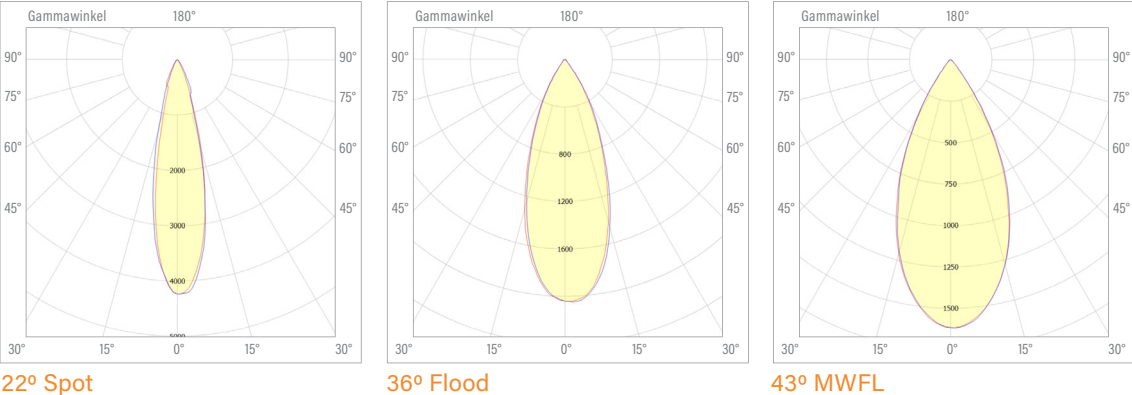

22° Spot

36° Flood

43° MWFL